

Operational mode Mains parallel operation with net replacement function
Energy efficiency ¹⁾ **A++**
Seasonal heating efficiency ²⁾ **236.8 %**

Fuel Natural gas

<i>stepless modulation range</i>	- 100 % -	- 50 % -
Electric output (P_{el})	22.0 kW	11.0 kW
Emergency power output	18.0 kW	
Thermal output ⁸⁾ (P_{th})		
with calorific value use (RT 30 °C) ⁹⁾	51.1 kW	34.3 kW
with calorific value use (RT 40 °C)	49.6 kW	33.6 kW
without calorific value use (RT 60 °C)	44.5 kW	30.0 kW
Fuel consumption ¹⁾		
with calorific value use (RT 40 °C)	68.6 kW	42.4 kW
without calorific value use (RT 60 °C)	68.8 kW	42.3 kW
CHPP coefficient ³⁾	0.44	0.33

- All of the following information at rated power (100 %) and 40 °C return -

Efficiency	- EN 50465 -	- actual value -
Total efficiency	104.4 %	99.2 %
Electric efficiency	32.1 %	30.5 %
Thermal efficiency	72.3 %	68.7 %

Primary energy savings ⁴⁾ **33.6 %** 30.1 %

Primary energy factor $f_{PE,WV}$ ⁷⁾ **0.28** 0.36

Total annual use efficiency ⁴⁾ **104.4 %** 99.2 %

Gas-connection pressure **20-50 mbar**

Gas-flow pressure **≥ 16 mbar**

Flow rate with natural gas-H **7.2 Nm³/h** (10.0 kWh/m³)

Flow temperature **max. 90 °C**

Return temperature **max. 70 °C**

Max. System pressure **6 bar** (heating side)

Fresh air requirement **min. 220 m³/h** (254 kg/h)

Ambient temperature **5 °C to max. 35 °C**

Exhaust gas emissions at 5 Vol% remaining oxygen

CO (carbon monoxide) < 100 mg/m³

NOx (nitrogen oxide) < 100 mg/m³

CH₂O (formaldehyde) < 1 mg/m³

Exhaust gas temperature ³⁾ **~ 50 °C**

Exhaust gas volume flow **~ 83 m³/h**

Exhaust gas mass flow dry **~ 91 kg/h**

Exhaust gas back pressure ⁵⁾ **max. 5 mbar** after CS

Sound pressure level CHPP ⁶⁾ **50.6 dB(A)** (1 m distance)

CHPP: Dimensions, weights and connections

L x W x H CHPP w/o handles 1.61 x 0.82 x 0.98 m

Weight CHPP incl. oil + water 770 kg

ø x H CS ⁵⁾ 0.30 x 1.52 m (w/o flanges)

Weight CS ⁵⁾ 30 kg


Colour CHPP Pantone 5517C

Heating connections R 1" Flow (warm)


R 1" Return (cold)

Exhaust gas connection CS ⁵⁾ DN100 (Jeremias ew-kl)


Gas connection R 3/4"

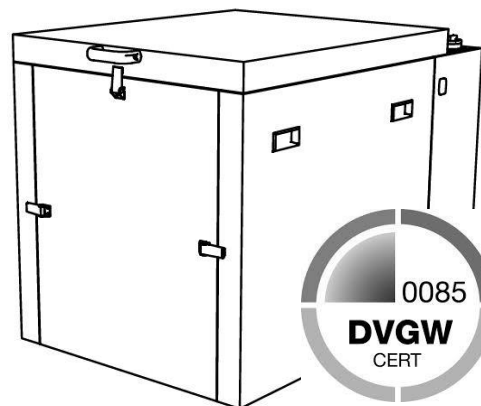


Output curve [kW_{th} / kW_{el}]

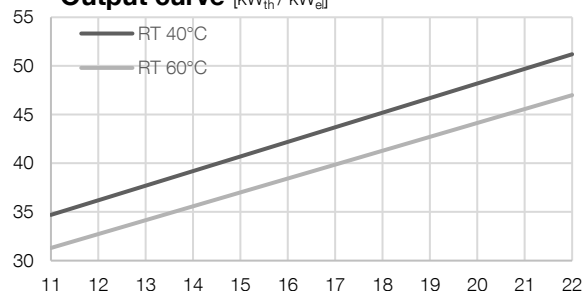

Consumption curve ³⁾ [kW_b / kW_{el}]

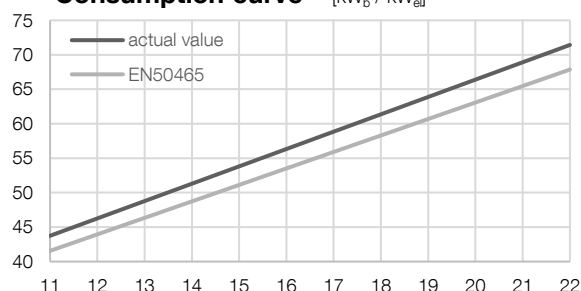

Sound pressure level curve ⁶⁾ [dB(A) / Hz]

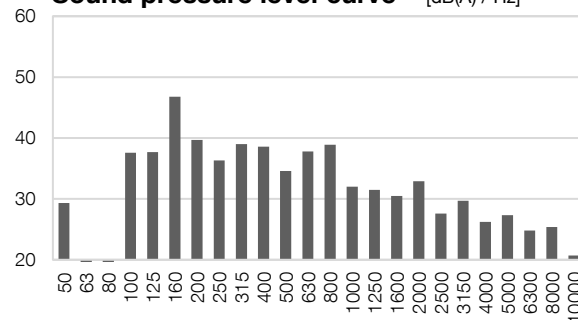

¹⁾ According to EN 50465, tolerance 5 %

²⁾ Seasonal space heating efficiency CHP according to DIN EN 50465:2015, Kap. 7.6.2.2

³⁾ Return-temperature 40 °C

⁴⁾ According to EU RL 2004/8/EG with 100 % internal use

⁵⁾ Combination silencer

⁶⁾ According to DIN EN ISO 3744:2011-2

⁷⁾ According to EnEV 2014: f_{PE} -current = 2.8

⁸⁾ System as new values

⁹⁾ Calculated values only

Engine	K24
Type	Straight engine (Otto)
Operation	4-stroke
Cylinder	4
Displacement	2.4 litres
Nominal engine speed	1500 1/min

Cabinet: Dimension and weight

(Wall mounting, connections at the bottom, standard cable set 6 m)

W x D x H	0.50 x 0.25 x 0.70 m
Weight	35 kg
Colour	Pantone 5517C

Synchronous generator

	mecc alte ECP
Cooling	air-cooled
Power	24.0 kW
Rated voltage	400 V
Rated current	43.3 A
Frequency	50 Hz

Electrical data smartblock 22s


max. effective power PA_{max}	22.0 kW
max. apparent power SA_{max}	24.4 kVA
cos ϕ	0.95 cap. ... 0.90 ind.
Nominal current I_N	35.3 A
Nominal voltage U_N	400 V AC
Grid feed	three-phase
Island operation mode available	yes
Motor start provided	no
Starting current I_A	0 A
Subtransient reactance X''_d	9.02 %
Short-circuit resistance of the system I_k	10 kA
Reactive power compensation	present
Number of compensation steps	stepless
Own consumption (Stand-by)	0.060 kW
Enclosure rating (DIN EN 60529)	IP 20
Line protection at building site	SLP 50 A "C"-Characteristics

Connection to the low voltage grid

Operational mode according to VDE-AR-N 4105
 "Generation units at the low voltage grid - technical minimum requirements for connection and parallel operation of generation units at the low voltage grid"

Settings grid protection (VDE-AR-N 4105)

Voltage drop protection $U<$	0.8 U_n (100 ms)
Voltage increase protection $U>$	1.1 U_n (100 ms)
Voltage increase protection $U>>$	1.15 U_n (100 ms)
Frequency drop protection $f<$	47.5 Hz (100 ms)
Frequency increase protection $f>$	51.5 Hz (100 ms)

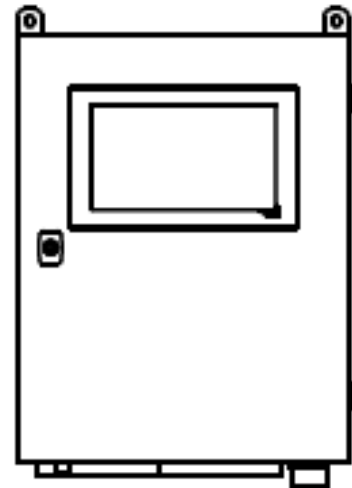

smartblock 22s control BR18

The freely programmable PLC system is equipped with analogue resistive touch screen display for controlling, regulating, counting and visualization, which are required for operating the CHP. The 10.1" display shows information from the CHP and the current status of the system.

The BR18 can optionally be expanded by a heating control system, requirement peak load boiler (up to 2 boilers), data transfer via LAN and Internet with an error notification via email (only with DSL) and an interface connection to external systems (Ethernet UDP, Mod-Bus RTU/TCP, RK512, 3964R).

Additionally, the CHPP can be connected to virtual power plants using VHP-Ready and net.strom.

Standard reference conditions according to EN 50465: The technical data are based on natural gas H with a heating value of 10,0 kWh/Nm³ (Total air pressure 100 kPa, air temperature 25 °C, relative humidity 30 %, 0m above sea level). The nominal power can be less, depending on the actual height above sea level. The tolerance of the specific fuel consumption is +5 % at nominal power (EN 50465) and the tolerance of the usable thermal output is 7 % at nominal power. We reserve the right to change data and characteristics without prior notice in accordance with our business policy and the ongoing development process. All details refer to systems as new without wear and tear or traces of usage.